



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

PCT

(10) International Publication Number
WO 01/43389 A2

Lanc, Allen, TX 75013 (US). **WHYNOT, Stephen:** 8610 Southwestern Boulevard #1007, Dallas, TX 75206 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

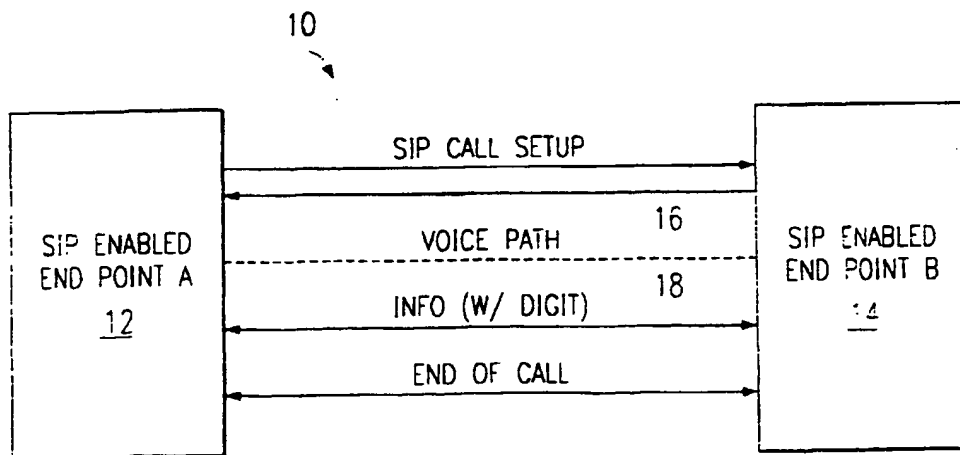
Published:
— *Without international search report and to be republished upon receipt of that report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TION FOR A PACKET NETWORK.

□

16 SID_ENABLED



(57) Abstract: A system and method is provided for collecting and transporting DTMF digits between two network end points in a packet network in order to preserve the integrity of the DTMF digits. The system and method use a Session Initiation Protocol (SIP), which is currently defined by the standard body of Internet Engineering Task Force. SIP applications utilize certain predetermined messages, such as an INFO message, and templates. DTMF digits can be collected and transported by using the SIP INFO messages. This works especially well for telephony applications which may require mid session signaling.

WO 01/43389 A2

DTMF DIGIT COLLECTION AND TRANSPORTATION FOR A PACKET NETWORK

Background of the Invention

The present invention relates generally to telecommunication systems, and more particularly, to a system and method for collecting and transporting dual tone multi-frequency ("DTMF") digits through a packet network.

5 Packet networks are often preferred over traditional circuit-switched communication networks because they provide speed, flexibility and efficiency for data communication. However, much of the hardware equipment currently in existence is designed for the circuit-switched communication networks such as the public switched telephone network ("PSTN"). The coexistence of both types of networks creates many gaps between the
10 technologies. Traditionally, a voice conversation and DTMF digits are transported together over the PSTN through a voice channel. Because the comparatively slow speed of traditional communication technology, the DTMF digits will be well preserved.

DTMF digits are not always well preserved in a high speed packet network. Packet networks compress and embed information into small and numerous packets, and send the
15 packets out with the expectation that all these packets will be appropriately received by another end point and assembled accordingly. However, it is inevitable that some information may not be recoverable by the receiving end point and thus lost in between the two end points. This is especially true when transferring DTMF digits in a voice channel over a packet network. Since a DTMF digit bears information of a relatively small size, it is
20 more likely that the receiving end point cannot assemble packets to obtain a full comprehension of the sent tone.

Therefore, what is needed is a system and method for collecting and transporting DTMF digits over a channel independent of the voice channel in order to preserve the integrity of the DTMF digits.

25 Summary of the Invention

A system and method is provided for collecting and transporting DTMF digits between two network end points in a packet network in order to preserve the integrity of the DTMF digits. In one embodiment, the present invention uses a Session Initiation Protocol (SIP), which is currently defined by the standard body of Internet Engineering Task Force.

Referring now to Fig. 1, a communication network system 10 including two SIP enabled end points is shown. When a SIP enabled end point A 12 initiates a SIP call setup message to be sent to an end point B 14, it starts a call session. Thereafter, other handshake messaging processes are completed to establish a voice path 16. Users at the two end points
5 can then use the voice path 16 for exchanging voice information. Since the voice path is a packet network, voice information is encoded into a series of packets. System error may cause a loss of a small number of such packets in a high speed data exchange, but will not affect the overall quality of the voice information at the receiving end since sufficient information can be extracted from the received packets. While it may be acceptable to
10 occasionally lose packets of voice information, it is often not acceptable to lose DTMF digits. However, collecting and transporting DTMF digits in packet form through the voice path 16 increases the risk of losing the digits.

In response to this problem, the present invention avoids the use of the voice path as a vehicle to transport the DTMF digits. Instead, the DTMF digits are collected and
15 transferred in SIP messages. One such message is a SIP INFO message 18. An INFO message is a standard SIP message. However, in the present embodiment, the INFO message is used to collect and encode DTMF digits. Furthermore, the exchange of DTMF digits using INFO messages can be bi-directional, if needed.

Fig. 2 illustrates the communication network system 10 in accordance with another
20 embodiment of the present invention showing communications exchanged between a SIP enabled end point A and a SIP enabled Requestor 20. After a SIP call is setup between the end point A and the Requestor, a voice path is established for a call session. Then the Requestor requests the end point A to collect mid session DTMF digits through an INFO message. The end point A collects the digits and sends them back to the Requestor through
25 the INFO message as well. By doing so, the INFO message becomes a communication channel for DTMF digits.

Fig. 3 illustrates a flow diagram showing steps taken by the end point A and the Requestor of Fig. 2 for collecting and transporting mid session DTMF digits. In step 22, the Requestor sends a request for collecting mid session digits through the INFO message. In
30 step 24, a Digit Map template is sent in the request to inform end point A to collect digits according to the instruction and format defined in the Digit Map. Once the Digit Map is received, end point A confirms its receipt through an INFO message in step 26. In step 28,

the end point A also checks a Digit Map Flag to see whether the received Digit Map should be stored for future use after the current Digit Map has been processed or used to immediately replace the Digit Map currently being processed.

In one embodiment of the present invention, if the Digit Map Flag equals to 1, then, in step 30, the received Digit Map is stored to be used for collecting digits for the next round, otherwise, in step 32, the received Digit Map will be used immediately in replacement of the Digit Map on hand. Once an appropriate Digit Map is determined, end point A starts to collect mid session DTMF digits in step 34. After the collection is done, the collected digits are sent from end point A to the Requester in another INFO message in step 36. Upon receiving the newly collected digits, the Requestor confirms to end point A of such receipt through an INFO message in step 38.

Fig. 4 illustrates a schematic of a communication network system 10 having SIP enabled equipment, traditional PSTN equipment, and a SIP-to-PSTN gateway. Due to the existence of the PSTN equipment, the above described mid session digit collection method through the use of SIP technology must deal with non-SIP enabled PSTN equipment. In Fig. 4, a dotted line 40 artificially indicates a boundary between the SIP enabled portion and the PSTN portion of the communication network 10. A SIP-to-PSTN gateway 42 can be installed to assure smooth data flow between the two portions of the communication network 10. On the SIP side of the network, there are "N" number of SIP enabled end points 12 that can be communicating to the gateway 42 by using the voice channel and the INFO message channel. Once the gateway 42 receives all the collected DTMF digits, it then converts them and further transmits them through traditional PSTN voice path.

For the purpose of describing the present invention, an example set of message syntaxes are defined as follows in one embodiment of the present invention:

The Request message is formatted as specified in SIP RFC 2543 standard:

Request = Request-Line

*(general-header

| request-header

| Content-Encoding

| Content-Length

| Content-Type)

CRLF

[message-body]

wherein Request-Line = Method SP Request-URI SP SIP-Version CRLF;

Method = "INFO"

Content-Type = ("Content-Type" | "c") ":" media-type

media-type = "application/vnd.nortelnetworks.digits"

message-body = Package-Name CRLF Package-Type CRLF

Package-Body CRLF

Package-Name = ("Package-Name" | "p") "=" Pkg-Name

Pkg-Name = ("Digit-Collection" | token)

Package-Type = ("Package-Type" | "y") "=" Pkg-Type

Pkg-Type = ("DigitMap" | "Digits" | "Cancel")

Package-Body = (Digitmap-Body | Digits-Body)

The Package-Name parameter provides a frame work to define different packages, therefore it is easy to add new types of information if needed, which makes the frame work extensible. The Digit-Collection package includes three kinds of package types: (1) the DigitMap package type may include a Digitmap-Body; (2) the Digits package type may include a Digits-Body; and (3) the Cancel package type includes no Package-Body.

The Digitmap-Body in the DigitMap message is a template for the digit collection. In the template, it specifies instructions and formats for the digit collection. The Digitmap-Body is sent by a Requestor in an INFO message with the Package-Type defined as DigitMap before any digits are collected. Upon receiving this message, a receiver such as the end point A in Fig. 2 should respond with a 200 OK message to confirm the receipt of the same and start collecting digits according to the Digitmap-Body (i.e., the template). Once collection is complete, end point A sends an INFO message having Digits as the Package-Type and with the Digits-Body containing the collected digits.

A valid Digitmap-Body includes one or more of the following fields that can be specified in any order:

Digitmap-Body = Min-Digits CRLF

Max-Digits CRLF

Inter-Digit-Timer CRLF

Last-Digit-Timer CRLF

Total-Timeout CRLF

Termination-Key-Flag CRLF

Termination-Key CRLF

Repeat-Count CRLF

Override CRLF

Digit-Map-Association CRLF

5

10

15

Inside the Digitmap-Body, the Min-Digits parameter defines the minimum number of digits to be collected. The Max-Digits parameter defines the maximum number of digits to be collected. The Termination-Key is not counted as either in the Min-Digits or the Max-Digits. The Inter-Digit-Timer parameter defines the maximum time that the system waits for the user between two key entries. The Last-Digit-Timer parameter defines the maximum time that the system waits for the user between two key entries. The Inter-Digit-Timer restarts after each key entry until the minimum number of digits (Min-Digits) have been collected, and the Last-Digit-Timer restarts after each key entry after the minimum number of digits (Min-Digits) have been collected. The value of both parameters may be specified in milliseconds. Further, the Total-Timeout parameter defines the total time that the system waits for a Max-Digits number of digits to be entered by a user. This timer is started when the digit collection process begins.

20

In addition, the Termination-Key-Flag defines a boolean flag that determines whether the Termination-Key should be included at the end of digit-string in the Digits-body. This flag value is specified as 1 (true) or 0 (false). If the flag is set to true and the user enters the Termination-Key, then the Termination-Key is appended at the end of digit-string. Otherwise, it is disregarded. The Termination-Key parameter specifies a specific key that the user enters to terminate the digit stream. Common Termination-Keys include the "#" or the "*".

25

30

Since a Digit Map can be reused, the Repeat-Count parameter defines the additional number of times the current Digit Map will be used after it has been used once. A repeat count value of 0 indicates no repetition after the digit collection has been performed once. A repeat count value of 1 indicates one additional collection need to be performed after an initial digit collection has been performed, resulting in a total of two (2) collections. The Override parameter indicates whether the Digit Map contained in the message should replace the current Digit Map or to be stored to a list of Digit Maps. The Override value is specified as either 1 (replace) or 0 (stored). A request to replace the existing Digit Map will

be accepted only when no digit collection is in progress thus avoiding any interruption of active digit collection.

The Digit-Map-Association field is used to tag the DigitMap message with a unique ID. Upon completion of the digit collection, the end point A may include the Digit-Map-Association ID from the DigitMap message to the Digits message. This allows the Requestor to synchronize Digit Maps with Digit messages it receives.

In a message of Digits Package type, the Digits-Body contains the digits a user has entered along with some additional information about those digits. A valid Digits-Body includes one or more of the following fields that can be specified in any order:

- 10 Digits-Body = Digit-String CRLF
- Termination-Key CRLF
- Termination-Key-Flag CRLF
- Playback-Tone-Duration CRLF
- Playback-Inter-Digit-Timer CRLF
- 15 Digit-Status CRLF
- Digit-Map-Association CRLF

Inside the Digits-Body, the Digit-String parameter holds the DTMF digits collected from the user. The Termination-Key-Flag tells whether the Digit-String field contains a termination key. A "0" indicates the termination key is not included, while a "1" indicates that it is included. Similar to the DigitMap Package type, the Termination-Key specifies a key that the user can enter to terminate a digit stream. The Playback-Tone-Duration parameter tells the recipient how long (in milliseconds) to pulse the tone of each digit. And the Playback-Inter-Digit-Timer parameter tells the recipient how long (in milliseconds) to pause between pulsing two digits.

25 Further, the Digit-Status field returns one of predefined labels describing the status of the message. The supported Digit-Status values are as follows:

- "success" - signifies that the Digit-String contains information that meets the requirements of the previously received DigitMap request.
- 30 "inter-digit-timer-exp" - signifies that the Digit-String of the Digits message is not complete, as the

Inter-Digit-Timer has expired before the minimum number of digits were entered.

"last-digit-timer-exp" - signifies that the Last-Digit-Timer has expired and the application now has to determine the validity of the Digit-String as it may or may not be complete.

"total-timer-exp" - signifies that the Total-Timer has expired and the application now has to determine the validity of the Digit-String as it may or may not be complete.

"unsolicited-digits" - signifies that the message was unsolicited (i.e., not resulting from a Digit Map request)

Similar to the DigitMap Package type, the Digit-Map-Association field is used to tag the Digits message with a unique ID.

Another type of message is a Cancel message, which is sent by the Requester to indicate that it would like to cancel the previous Digit Map message already sent. Immediately after receiving a Cancel message, the end point A cancels all pending digit collections based on the specified Digit Maps received earlier and stops the process of collecting any digits. Upon receiving this message, the client should respond with a 200 OK, to confirm the receipt of this Cancel message.

For clearly explaining the details of the present invention, a sample is given below to illustrate the communication between the Requester and the SIP enabled end point A.

Assuming that the Requester requests an account number from end point A, and the number is between 5 to 7 digits. It is to be terminated with a "#" which may be included in the digit message. Inter-Digit-Timer is set at 5 seconds, the Last-Digit-Timer is set at 4 seconds, and the Total-Timer is set to 45 seconds. For the sample shown below, the term "Client" is referred to the end point A.

First, the Requester sends a DigitMap request to the Client using SIP INFO message. The message body is shown as follows:

INFO sip:Client@47.161.18.26:5060 SIP/2.0

Via: SIP/2.0/UDP 47.161.18.122

To: sip:Client@nortelnetworks.com ;tag=615145584

From: sip:Requester@nortelnetworks.com

Call-ID: 1246884437@nortelnetworks.com

CSeq: 2 INFO

5 Content-Type: application/vnd.nortelnetworks.digits

Content-Length: 75

p=Digit-Collection

y=DigitMap

m=5

10 n=7

i=5000

l=4000

t=45000

k=#

15 f=1

r=0

o=0

a=3452985896

Then, end point A confirms the receipt of the DigitMap message by a 200 OK message as
20 shown below:

SIP/2.0 200 OK

Via: SIP/2.0/UDP 47.161.18.122

To: sip:Client@nortelnetworks.com ;tag=615145584

From: sip:Requester@nortelnetworks.com

25 Call-ID: 1246884437@nortelnetworks.com

CSeq: 2 INFO

Content-Length: 0

Next, the Client will collect digits based on the received Digit Map. Upon
completion of a successful digit collection, the Client sends a Digits message to the
30 Requester containing the collected digits. The message reads as follows:

INFO sip:Requester@47.161.18.26:5060 SIP/2.0

Via: SIP/2.0/UDP 47.161.18.122

To: sip:Requester@nortelnetworks.com ;tag=615145584

From: sip:Client@nortelnetworks.com

Call-ID: 1246884437@nortelnetworks.com

CSeq: 3 INFO

Content-Type: application/vnd.nortelnetworks.digits

Content-Length: 55

p=Digit-Collection

y=Digits

d=123456#

k=#

f=1

s=success

a=3452985896

The following INFO message would be sent from end point A to the Requester in the event that the Inter-Digit-Timer expires before the minimum number of digits have been collected.

INFO sip:Requester@nortelnetworks.com:5060 SIP/2.0

Via: SIP/2.0/UDP 47.161.18.122

To: sip:Requester@nortelnetworks.com ;tag=615145584

From: sip:Client@nortelnetworks.com

Call-ID: 1246884437@nortelnetworks.com

CSeq: 3 INFO

Content-Type: application/vnd.nortelnetworks.digits

Content-Length: 57

p=Digit-Collection

y=Digits

d=123

s=inter-digit-timer-exp

a=3452985896

Immediately thereafter, the Requester confirms the receipt of Digits message with the following message:

SIP/2.0 200 OK

Via: SIP/2.0/UDP 47.161.18.122
To: sip:Client@nortelnetworks.com ;tag=615145584
From: sip:Requester@nortelnetworks
Call-ID: 1246884437@nortelnetworks.com
5 CSeq: 3 INFO
Content-Length: 0

In order to cancel digit collection, the Requester sends the following message to
cancel the Digit Map:

10 INFO sip:Client@47.161.18.26:5060 SIP/2.0
Via: SIP/2.0/UDP 47.161.18.122
To: sip:Client@nortelnetworks.com ;tag=615145584
From: sip:Requester@nortelnetworks.com.com
Call-ID: 1246884437@nortelnetworks.com
CSeq: 3 INFO
15 Content-Type: application/vnd.nortelnetworks.digits
Content-Length: 30
p=Digit-Collection
y=Cancel

whereas end point A confirms the receipt of the Cancel message with the following message:

20 SIP/2.0 200 OK
Via: SIP/2.0/UDP 47.161.18.122
To: sip:Client@nortelnetworks.com ;tag=615145584
From: sip:Requester@nortelnetworks
Call-ID: 1246884437@nortelnetworks.com
25 CSeq: 3 INFO
Content-Length: 0

While the invention has been particularly shown and described with reference to the
preferred embodiment thereof, it will be understood by those skilled in the art that various
changes in form and detail may be made therein without departing from the spirit and scope
30 of the invention, as set forth in the following claims.

IDS References

- [1] M. Handley, H. Schulzrinne, E. Schooler and J. Rosenberg:
"SIP: Session Initiation Protocol", RFC 2543, March 1999
- 5 [2] S. Donovan, M. Cannon: "The SIP INFO Method", Internet draft
(draft-ietf-mmusic-sip-info-method-01), IETF, June 1999. Work in
progress.
- [3] N. Freed, N. Borenstein: "Multipurpose Internet Mail
Extensions (MIME) Part Two: Media Types", RFC 2046, IETF, November
1996.
- 10 [4] J. Kuthan: "Sample Uses of SIP INFO with Varying Reliability
Needs", Internet draft (draft-kuthan-sip- infopayload-00), IETF,
October 1999. Work in progress.

Claims

WHAT IS CLAIMED IS:

1. A method for collecting and transporting one or more mid session digits through a packet communication channel between two end points in a telecommunication system, the method comprising the steps of:

5 encoding the mid session digits in an INFO message whose format is defined by a Session Initiation Protocol; and
exchanging the encoded mid session digits through the packet communication channel independent of a packet communication channel for exchanging voice information.

10 2. A method for collecting and transporting one or more mid session digits through a packet communication channel between a first end point and a second end point in a telecommunication system, the method comprising the steps of:

sending a request for collecting the mid session digits from the first end point to the second end point;

15 providing a template by the first end point to the second end point including digit collection format and instructions;

collecting the mid session digits by the second end point according to the digit collection format and instructions provided in the template; and

20 sending the collected mid session digits from the second end point to the first end point,

wherein all the above communications between the first and the second end points are through one or more INFO messages conforming to a Session Initiation Protocol (SIP).

25 3. The method of claim 2 further comprising a step of confirming the receipt of the template by sending an INFO message from the second end point to the first end point.

4. The method of claim 2 further comprising a step of determining an immediate use of a digit map in the template for the digit collection.

5. The method of claim 4 wherein the step of determining includes one of either storing the digit map for a next round of digit collection or replacing any existing digit map received by the second end point.

5 6. The method of claim 2 further comprising a step of confirming the receipt of the collected digits by an INFO message from the first end point to the second end point.

7. The method of claim 2 further comprising the steps of:
converting the collected digits into a format acceptable for transmission in a
10 predetermined communication channel not configured for the SIP standard.

8. The method of claim 2 further comprising a step of sending a cancel message in an INFO message to terminate any active digit collection.

15 9. A method for collecting and transporting one or more mid session digits through a packet communication channel between a first and a second end points in a telecommunication system, the method comprising the steps of:

sending a request for collecting the mid session digits from the first end point to the second end point;

20 providing a template by the first end point to the second end point including digit collection formats and instructions;

confirming the receipt of the template by the second end point;

determining an immediate use of a digit map in the template for the digit collection;

25 collecting the mid session digits by the second end point according to the digit collection format and instructions provided in the template;

sending the collected mid session digits from the second end point to the first end point; and

confirming the receipt of the collected digits by the first end point,

30 wherein all the above communications between the first and the second end points are through one or more INFO messages conforming to a Session Initiation Protocol (SIP).

10. The method of claim 9 wherein the step of determining further includes one of either storing the digit map for a next round of digit collection or replacing any existing digit map received by the second end point.

5 11. A system for collecting and transporting one or more mid session digits through a packet communication channel between a first and a second end points in a telecommunication system, the system comprising:

a first subsystem for collecting the mid session digits sent from the first end point to the second end point;

10 a template including digit collection format and instructions;

a second subsystem for collecting the mid session digits by the second end point according to the digit collection format and instructions provided in the template; and

a third subsystem for sending the collected mid session digits from the second end point to the first end point,

15 wherein both the first and the second end points are configured for applications using a Session Initiation Protocol (SIP) and all communications between the two end points are through one or more INFO messages conforming to the SIP standard.

20 12. The system of claim 11 further comprising a fourth subsystem for confirming the receipt of the template by the second end point.

13. The system of claim 11 further comprising a fourth subsystem for determining an immediate use of a digit map in the template for the digit collection.

25 14. The system of claim 13 wherein the fourth subsystem for determining further includes one of either a fifth subsystem for storing the digit map for a next round of digit collection or a sixth subsystem for replacing any existing digit map received by the second end point.

30 15. The system of claim 11 further comprising a fourth subsystem for confirming the receipt of the collected digits by the first end point.

16. The system of claim 11 further comprising a fourth subsystem for converting the collected digits in the INFO message into a format acceptable for transmission in a predetermined communication channel not configured for the SIP standard.

5 17. The system of claim 11 further comprising a fourth subsystem for sending a cancel message in an INFO message to terminate any active digit collection.

18. A system for collecting and transporting one or more mid session digits through a packet communication channel between a first and a second end points in a telecommunication system, the system comprising:

10 a request message for collecting the mid session digits sent from the first end point to the second end point;

a template including digit collection formats and instructions;

means for confirming the receipt of the template by the second end point;

15 means for determining an immediate use of a digit map in the template for the digit collection;

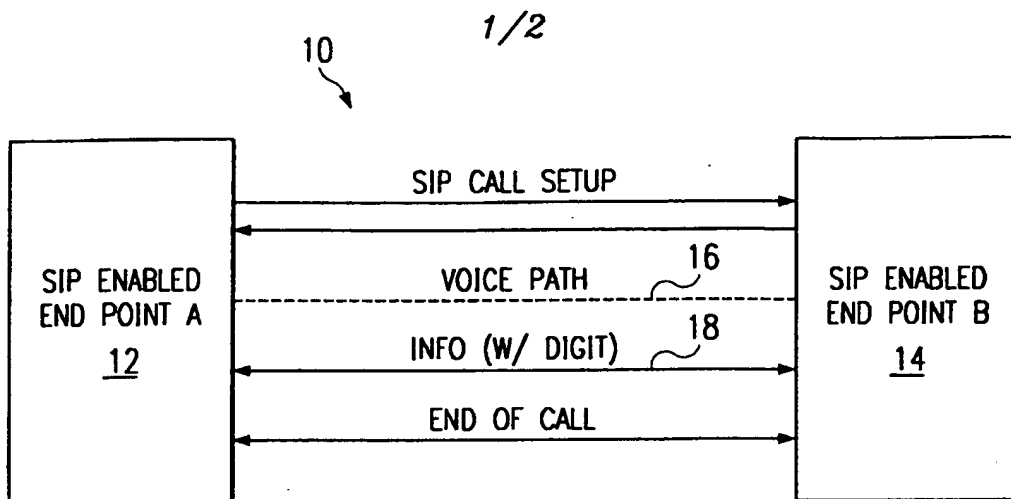
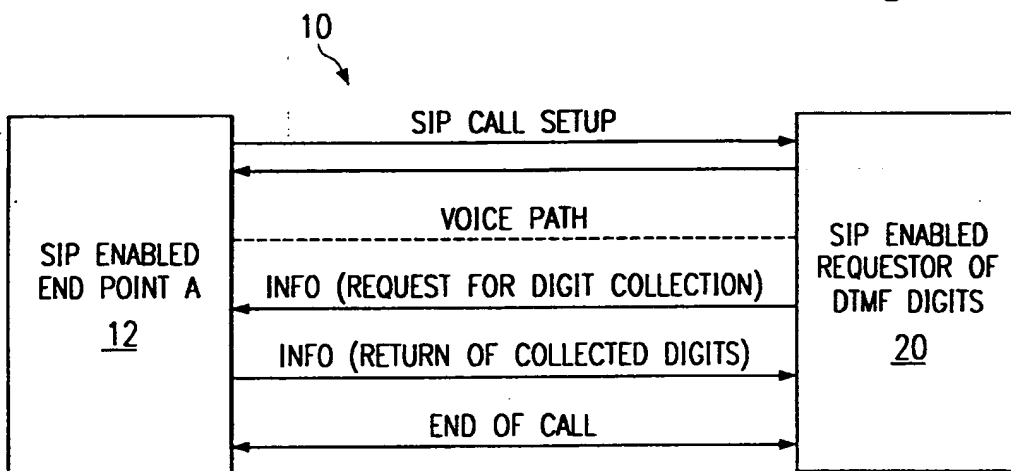
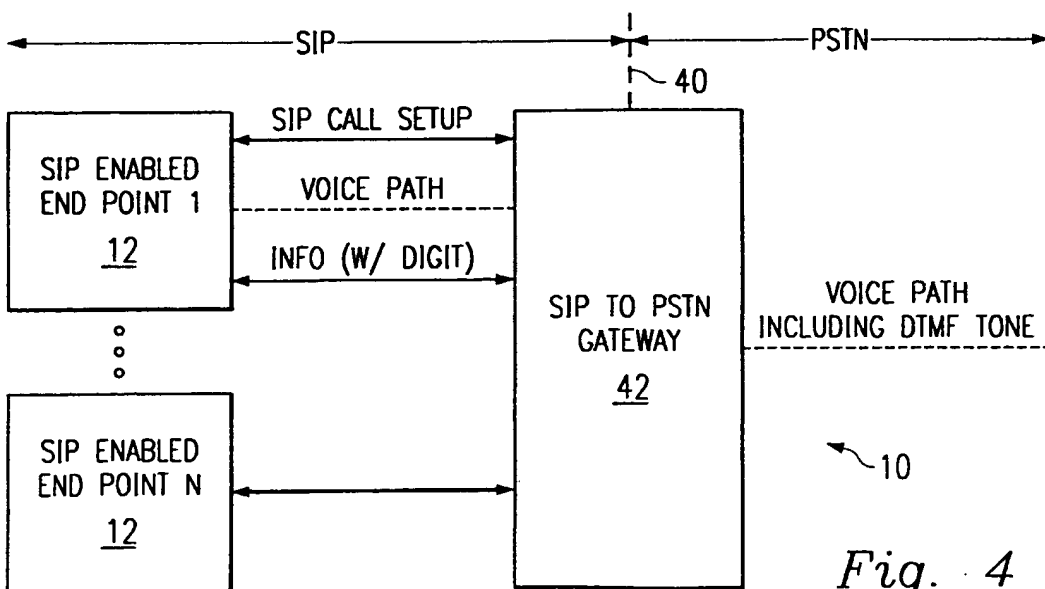
means for collecting the mid session digits by the second end point according to the digit collection format and instructions provided in the template;

20 means for sending the collected mid session digits from the second end point to the first end point; and

means for confirming the receipt of the collected digits by the first end point,

wherein both the first and the second end points are configured for applications using a Session Initiation Protocol (SIP) and all communications between the first and the second end points are through one or more INFO messages defined by the SIP.

25 19. The system of claim 18 wherein the means for determining further includes one of either a means for storing the digit map for a next round of digit collection or a means for replacing any existing digit map received by the second end point.

*Fig. 1**Fig. 2**Fig. 4*

2/2

Fig. 3